


INSTRUCTION MANUAL

DAIWA`s slim,compact,lightweight, and highly efficient switch-mode power supply is capable of delivering 30A at all DC OUTPUT VOLTAGES. (10 - 30V)
DAIWA only gives you a 30A switch-mode power supply.




■ FEATURES

- 1/4 the weight (4.8Kg), and 1/3 the size of conventional power supplies.
- The use of high speed F.E.T. technology ensures 84% conversion efficiency.
- 30A available at all DC output voltages. (10V~30V)
- Can be used for DC motors requiring peak starting currents.
- Automatic cooling fan.
- Perfect for laboratory, industrial, and ham radio applications.


■ SPECIFICATIONS

	SS-606H	
INPUT VOLTAGE	AC100—117V	AC220—240V
INPUT VOLTAGE RANGES	AC90—123V	AC180—245V
OUTPUT VOLTAGE	DC10V—30V	
OUTPUT CURRENT	30A (Max31A)	
VOLTAGE FLUCTUATION	Less than 1.5%	
RIPPLE VOLTAGE	Less than 5mV	
CONVERSION RATIO	84% at 22A	
PROTECTION	CUT OFF 31A	
POWER CONSUMPTION	1000W	
FUSE	15A	8A
DIMENSIONS (mm)	216W × 110H × 360D	
WEIGHT	only 4.8Kg	

■ FRONT PANEL

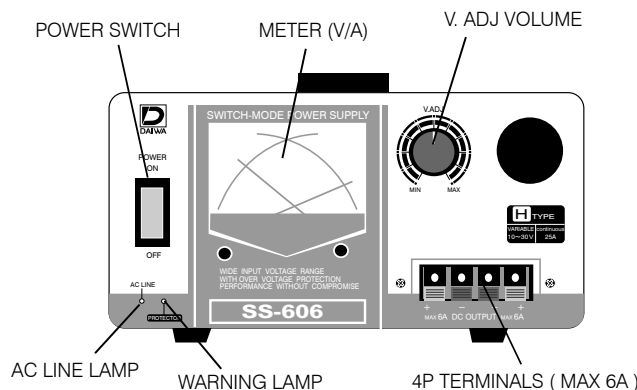

■ REAR PANEL

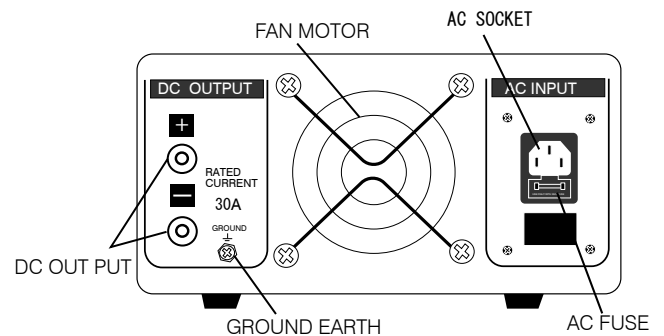

■ Standard accessories

1.AC corde : 1 pc.

■ CAUTION

- 1) PLEASE DON'T USE AS A CAR BATTERY CHARGER.
- 2) Use only in a well ventilated place.
- 3) Connect the AC plug directly to an AC wall socket.
- 4) Connect the chassis of the unit to the ground earth.
- 5) At high internal temperatures, the protection circuit will limit the output current.
- 6) Due to the presence of large magnetic field, please ensure that the output cable of the SS-606H is kept as far away from your antenna connecting cable as possible.
- 7) Be sure to use at least 5.5mm diameter wire.